




2933 siatur jo

For curves and profiles with radii from 10 mm

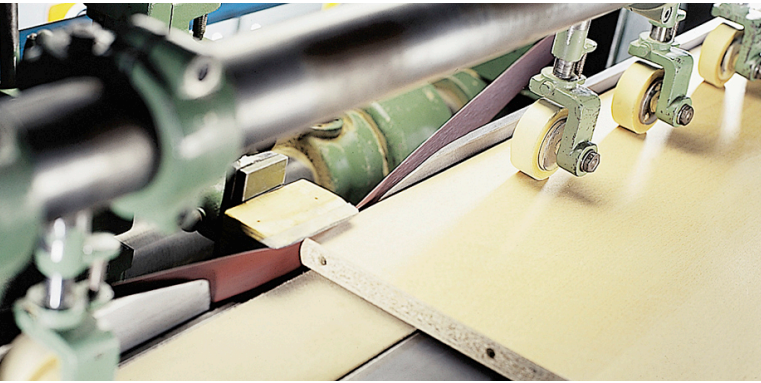

For curves and profiles with radii from 10 mm

A high level of dimensional accuracy and the ability to adapt to contours and curves is extremely important in profile belt sanding – and that's exactly what 2933 jo siatur was designed for.

- ▶ Perfect surfaces thanks to TopTec
- ▶ Dust-free process: Antistatic construction minimises dust build-up on belt, workpiece and machinery
- ▶ High level of dimensional accuracy during profile belt sanding
- ▶ Highly adaptable to contours, curves and profiles
- ▶ Long product life when sanding softwood and wood containing resins
- ▶ Suitable for pneumatic rollers

Product profile

Grit type:	Aluminium oxide
Grit range:	60-180
Backing:	J-wt cloth, cotton
Coating:	Electrostatic open
Bonding:	Resin over resin
Equipment:	TopTec

Use



Applications

- Coarse sanding of curves and profiles
- Final sanding of profiled workpieces
- Profile grinding for radii greater than 10 mm
- Flush sanding of edges and protrusions

Materials

Soft wood; Hard wood; Resinous wood; Solid surface material; Plywood panel; MDF board

Technology

Open coating; siafast; TopTec